

Купити це та інше охоронне обладнання можна на сайті pipl.ua. Оформити замовлення: order@pipl.ua

DS-7100NI-Q1/P SERIES NVR

Key Feature

- H.265+/H.265/H.264+/H.264 video compression
- Up to 40/60 Mbps incoming bandwidth, and 60 Mbps outgoing bandwidth
- Up to 4/8-ch network camera inputs
- Up to 4-ch 1080p decoding capability
- HDMI and VGA simultaneous output



Compression and Recording

- H.265+ compression effectively reduces the storage space by up to 75%
- Full channel recording at up to 4 MP resolution

Storage and Playback

- 2-ch@4 MP or 4-ch@1080p playback resolution
- 1 SATA interface (up to 6 TB capacity per HDD)

Smart Function

- Supports line crossing and intrusion detection
- Smart search for the selected area in the video; and smart playback to improve the playback efficiency
- Automatically search and add network cameras after device is activated

Network & Ethernet Access

- 4/8 independent PoE network interfaces
- 1 self-adaptive 10/100 Mbps Ethernet interface
- Hik-Connect for easy network management




Specification

Model	DS-7104NI-Q1/4P	DS-7108NI-Q1/8P
Video and Audio		
IP video input	4-ch	8-ch
	Up to 4 MP resolution	
Incoming bandwidth	40 Mbps	60 Mbps
Outgoing bandwidth	60 Mbps	
HDMI output	1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
VGA output	1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
Video output mode	HDMI/VGA simultaneous output	
Decoding		
Decoding format	H.265+/H.265/ H.264+/H.264	
Recording resolution	4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF	
Synchronous playback	4-ch	8-ch
Capability	4-ch@1080p (25 fps), 2-ch@4 MP (25 fps)	
Stream type	Video, Video & Audio	
Network		
Remote connection	16	
Network protocol	TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, UPnP™	
Network interface	1, RJ-45 10/100 Mbps self-adaptive Ethernet interface	
PoE		
Interface	4, RJ-45 10/100 Mbps self-adaptive Ethernet interface	8, RJ-45 10/100 Mbps self-adaptive Ethernet interface
Power	≤ 36 W	≤ 75 W
Supported standard	IEEE 802.3 af/at	
Auxiliary interface		
SATA	1 SATA interface	
Capacity	Up to 6 TB capacity for each disk	
Alarm in/out	N/A	
USB interface	Rear panel: 2 × USB 2.0	
General		
Power supply	48 VDC, 1 A	48 VDC, 1.8 A
Consumption (without HDD and PoE off)	≤ 10 W	
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)	
Working humidity	10% to 90%	
Dimension (W × D × H)	200 × 200 × 48 mm (7.9" × 7.9" × 1.9")	285 × 210 × 48 mm (11.2" × 8.3" × 1.9")
Weight (without HDD)	≤ 1 kg (2.2 lb)	
Certification		
FCC	Part 15 Subpart B, ANSI C63.4-2014	
CE	EN50130-4, EN 61000-3-2,EN 61000-3-3	


Dimension

For DS-7104NI-Q1/4P

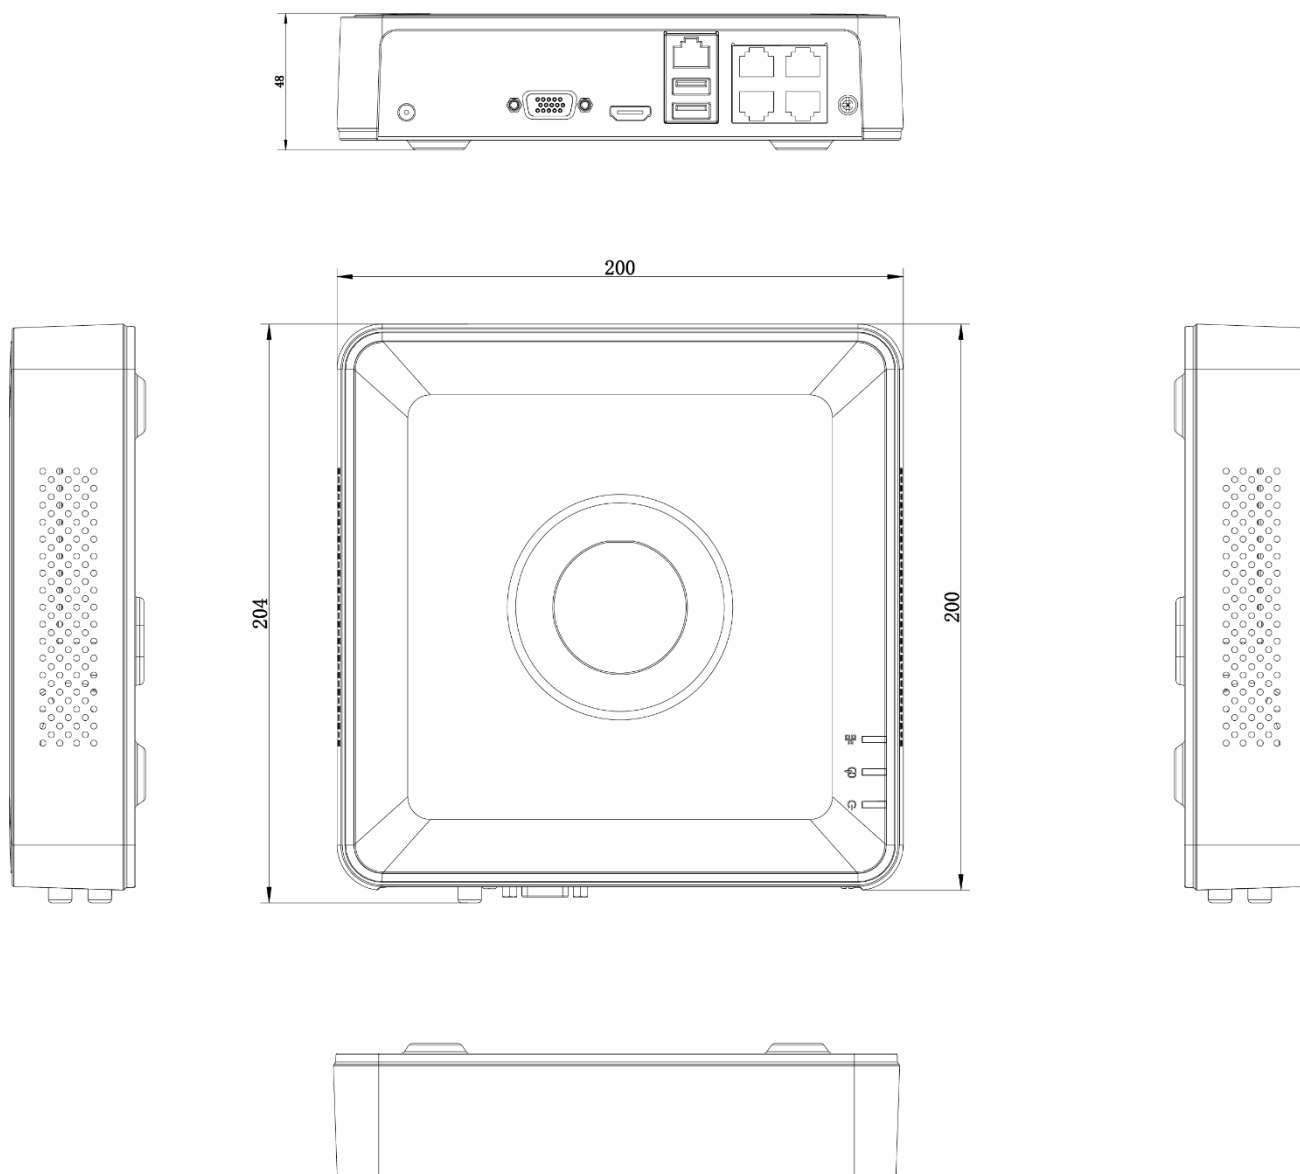


Unit: mm

For DS-7108NI-Q1/8P

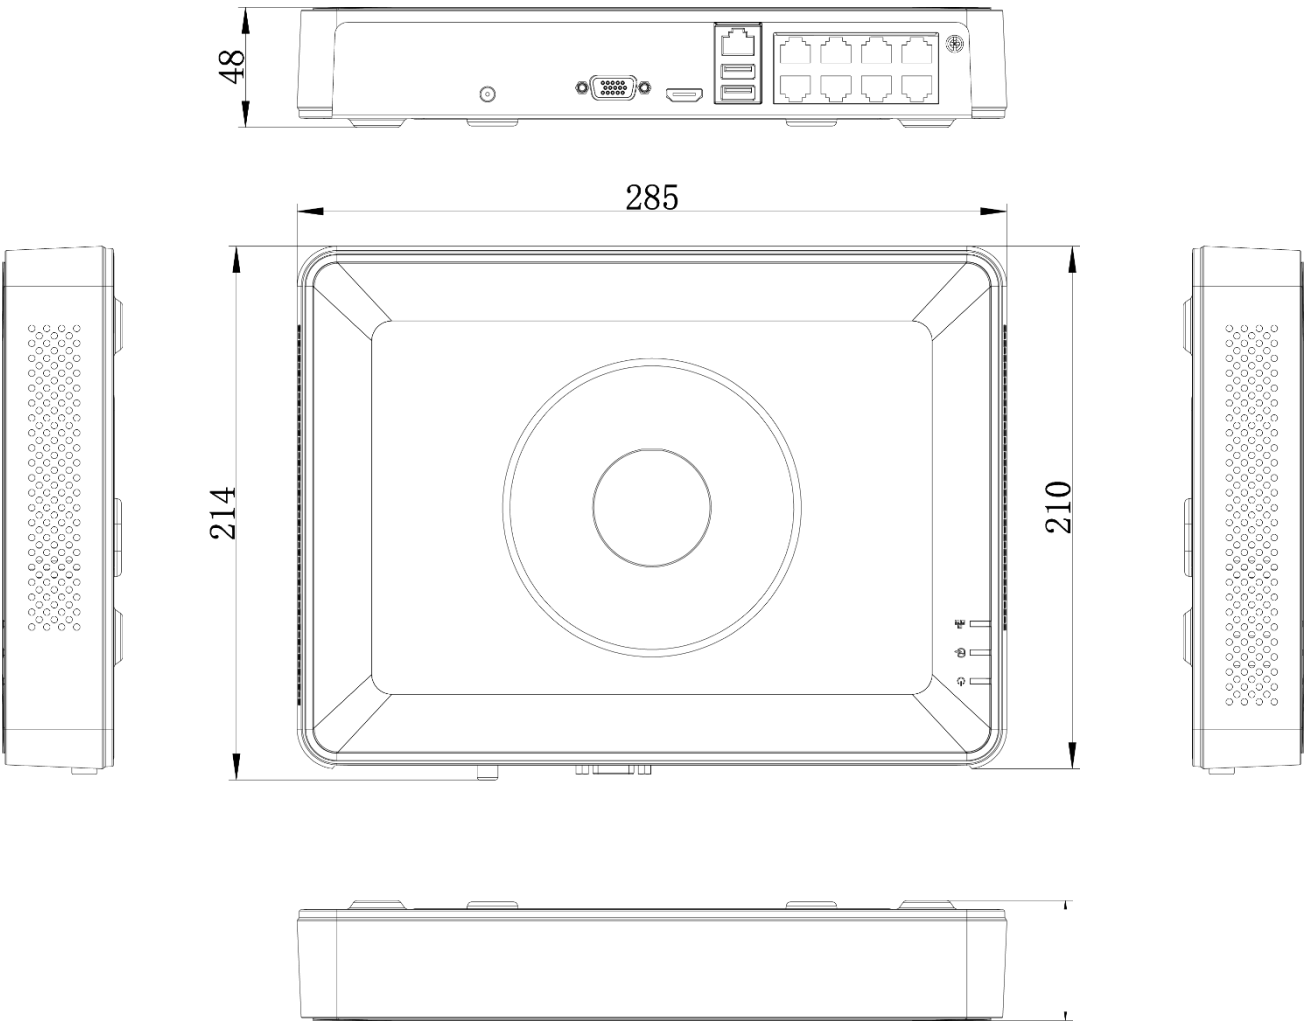

Physical Interface

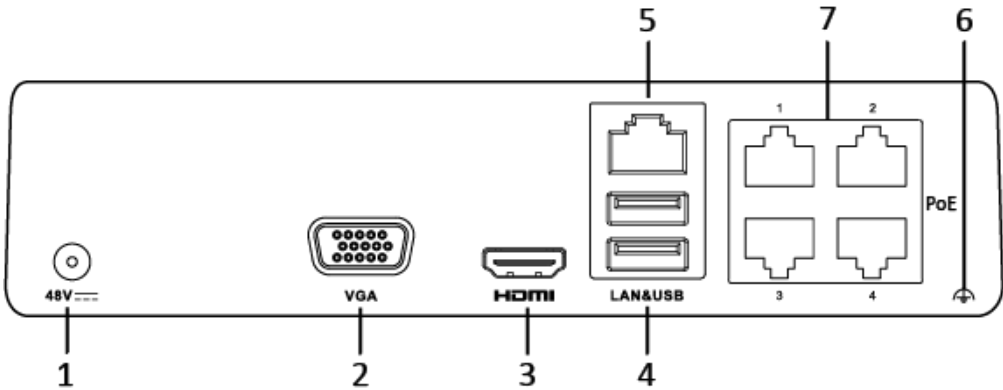

*: The rear panel of DS-7108NI-Q1/8P provides 8 PoE interfaces.

No.	Description	No.	Description
1	Power supply	5	LAN Network Interface
2	VGA interface	6	Ground
3	HDMI interface	7	Network Interfaces with PoE function
4	USB interface		

Available Model

DS-7104NI-Q1/4P, DS-7108NI-Q1/8P

Distributed by



Headquarters
No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (0) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-[0]31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
eslao.colombia@hikvision.com

04303002010111