

## DS-2CD3746G2-IZS

### 4 MP AcuSense IR Varifocal Dome Network Camera

# AcuSense

Powered by

**DarkFighter**



Empowered by deep learning algorithms, Hikvision AcuSense technology brings human or vehicle target classification alarms to front- and back-end devices. The system can greatly reduce false alarms generated by targets other than humans or vehicles, vastly improving alarm efficiency and effectiveness.

Hikvision has been dedicated to develop products with security since established. Hikvision always follows security by design principle and has adopted many methods of security technologies into our product development lifecycle, including terminal security, data security, application security, network security, and privacy protection. In the meantime, the security technologies used by Hikvision are all in compliance with local applicable laws and safety regulations. These security measures could enhance product's cyber security protection capability and protect your devices as well as your data from malicious cyber attacks.

- Supports Hikvision Embedded Open Platform (HEOP) and importing third party applications
- Supports 1.5 Tops computing power, 60 MB system memory, 400 MB smart RAM, and 2 GB eMMC storage for sharing resources
- High quality imaging with 4 MP resolution
- Excellent low-light performance with powered-by-DarkFighter technology
- Clear imaging against strong backlight due to 120 dB true WDR technology
- Efficient H.265+ compression technology
- False alarm reduction through human and vehicle target classification based on deep learning
- 3D DNR technology delivers clean and sharp images
- Motorized varifocal lens for easy installation
- Water and dust resistant (IP66) and vandal-resistant (IK10)

## ▪ Specification

| Camera                  |                                                                                                                                                                                                           |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor            | 1/3" Progressive Scan CMOS                                                                                                                                                                                |
| Max. Resolution         | 2688 × 1520                                                                                                                                                                                               |
| Min. Illumination       | Color: 0.003 Lux @ (F1.4, AGC ON), B/W: 0 Lux with IR                                                                                                                                                     |
| Shutter Time            | 1/3 s to 1/100,000 s                                                                                                                                                                                      |
| Day & Night             | IR cut filter                                                                                                                                                                                             |
| Angle Adjustment        | Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°                                                                                                                                                      |
| Lens                    |                                                                                                                                                                                                           |
| Lens Type               | Varifocal lens, motorized lens, 2.7 to 13.5 mm and 7 to 35 mm optional                                                                                                                                    |
| Focal Length & FOV      | 2.7 to 13.5 mm: horizontal FOV 107.6° to 32.9°, vertical FOV 56° to 18.5°, diagonal FOV 130.9° to 37.8°<br>7 to 35 mm: horizontal FOV 28.7° to 10.5°, vertical FOV 16° to 6°, diagonal FOV 33.1° to 12.1° |
| Lens Mount              | 2.7 to 13.5 mm: Ø14; 7 to 35 mm: Integrated                                                                                                                                                               |
| Iris Type               | Auto-iris                                                                                                                                                                                                 |
| Focus                   | Auto, Semi-auto, Manual                                                                                                                                                                                   |
| Aperture                | 2.7 to 13.5 mm: F1.4; 7 to 35 mm: F1.6                                                                                                                                                                    |
| DORI                    |                                                                                                                                                                                                           |
| DORI                    | 2.7 to 13.5 mm: D: 64 to 187 m, O: 25 to 74 m, R: 12 to 37 m, I: 6 to 18 m<br>7 to 35 mm: D: 218 to 580 m, O: 86 to 230 m, R: 43 to 116 m, I: 21 to 58 m                                                  |
| Illuminator             |                                                                                                                                                                                                           |
| Supplement Light Type   | IR                                                                                                                                                                                                        |
| Supplement Light Range  | 2.7 to 13.5 mm: up to 40 m; 7 to 35 mm: up to 50 m                                                                                                                                                        |
| Smart Supplement Light  | Yes                                                                                                                                                                                                       |
| IR Wavelength           | 850 nm                                                                                                                                                                                                    |
| HEOP                    |                                                                                                                                                                                                           |
| Open Resources          | Memory: 60 MB,<br>Smart RAM: 400 MB,<br>eMMC: 2 GB                                                                                                                                                        |
| Computing Power         | 1.5 TOPS                                                                                                                                                                                                  |
| Open Capability         | HEOP 2.0 OpendevSDK                                                                                                                                                                                       |
| Deep Learning Structure | Caffe, PyTorch, TensorFlow, PaddlePaddle, ONNX                                                                                                                                                            |
| Programming Language    | C, C++                                                                                                                                                                                                    |
| Video                   |                                                                                                                                                                                                           |
| Main Stream             | 50 Hz: 25 fps (2688 × 1520, 1920 × 1080, 1280 × 720)<br>60 Hz: 30 fps (2688 × 1520, 1920 × 1080, 1280 × 720)                                                                                              |
| Sub-Stream              | 50 Hz: 25 fps (1280 × 720, 640 × 480, 640 × 360)<br>60 Hz: 30 fps (1280 × 720, 640 × 480, 640 × 360)                                                                                                      |
| Third Stream            | 50 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360)<br>60 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360)                                                                            |
| Fourth Stream           | 50 Hz: 10 fps (1280 × 720, 640 × 480, 640 × 360)<br>60 Hz: 10 fps (1280 × 720, 640 × 480, 640 × 360)                                                                                                      |

|                             |                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Video Compression           | Main stream: H.265/H.264/H.264+/H.265+,<br>Sub-stream: H.265/H.264/MJPEG,<br>Third stream: H.265/H.264,<br>Fourth stream: H.265/H.264/MJPEG                                                                                                                                                                                                                                           |
| Video Bit Rate              | 32 Kbps to 8 Mbps                                                                                                                                                                                                                                                                                                                                                                     |
| H.264 Type                  | Baseline Profile,Main Profile,High Profile                                                                                                                                                                                                                                                                                                                                            |
| H.265 Type                  | Main Profile                                                                                                                                                                                                                                                                                                                                                                          |
| Bit Rate Control            | CBR,VBR                                                                                                                                                                                                                                                                                                                                                                               |
| Scalable Video Coding (SVC) | H.264 and H.265 encoding                                                                                                                                                                                                                                                                                                                                                              |
| Region of Interest (ROI)    | 5 fixed regions for main stream and sub-stream                                                                                                                                                                                                                                                                                                                                        |
| Target Cropping             | Yes                                                                                                                                                                                                                                                                                                                                                                                   |
| e-PTZ                       | Support Patrol and Auto Tracking settings                                                                                                                                                                                                                                                                                                                                             |
| <b>Audio</b>                |                                                                                                                                                                                                                                                                                                                                                                                       |
| Audio Compression           | G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC                                                                                                                                                                                                                                                                                                                                              |
| Audio Bit Rate              | 64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)/16 to 64 Kbps (AAC-LC)                                                                                                                                                                                                                                                     |
| Audio Sampling Rate         | 8 kHz/16 kHz/32 kHz/44.1 kHz/48 kHz                                                                                                                                                                                                                                                                                                                                                   |
| Environment Noise Filtering | Yes                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Network</b>              |                                                                                                                                                                                                                                                                                                                                                                                       |
| Protocols                   | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv4, IPv6, UDP, Bonjour, SSL/TLS, PPPoE, SFTP, ARP, SNMP, WebSocket, WebSockets, SRTP                                                                                                                                                                                                |
| Simultaneous Live View      | Up to 6 channels                                                                                                                                                                                                                                                                                                                                                                      |
| API                         | ONVIF (Profile S, Profile G, Profile T),ISAPI,SDK,ISUP                                                                                                                                                                                                                                                                                                                                |
| User/Host                   | Up to 32 users<br>3 user levels: administrator, operator, and user                                                                                                                                                                                                                                                                                                                    |
| Security                    | Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for Open Network Video Interface, RTP/RTSP over HTTPS, control timeout settings, security audit log, TLS 1.1/1.2/1.3, host authentication (MAC address) |
| Network Storage             | NAS (NFS, SMB/CIFS),Auto Network Replenishment (ANR),<br>Together with high-end Hikvision memory card, memory card encryption and health detection are supported.                                                                                                                                                                                                                     |
| Client                      | iVMS-4200,Hik-Connect,Hik-Central                                                                                                                                                                                                                                                                                                                                                     |
| Web Browser                 | Plug-in required live view: IE 10, IE 11,<br>Plug-in free live view: Chrome 57.0+, Firefox 52.0+, Edge 89+,<br>Local service: Chrome 57.0+, Firefox 52.0+, Edge 89+                                                                                                                                                                                                                   |
| <b>Image</b>                |                                                                                                                                                                                                                                                                                                                                                                                       |
| Image Parameters Switch     | Yes                                                                                                                                                                                                                                                                                                                                                                                   |
| Image Settings              | Rotate mode,saturation,brightness,contrast,sharpness,gain,white balance,adjustable by client software or web browser                                                                                                                                                                                                                                                                  |
| Day/Night Switch            | Day,Night,Auto,Schedule                                                                                                                                                                                                                                                                                                                                                               |
| Wide Dynamic Range (WDR)    | 120 dB                                                                                                                                                                                                                                                                                                                                                                                |
| Image Enhancement           | BLC,HLC,3D DNR,Defog                                                                                                                                                                                                                                                                                                                                                                  |
| SNR                         | ≥ 52 dB                                                                                                                                                                                                                                                                                                                                                                               |

|                                  |                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Privacy Mask                     | 4 programmable polygon privacy masks                                                                                                                                                                                                                                                                                                                  |
| <b>Interface</b>                 |                                                                                                                                                                                                                                                                                                                                                       |
| Ethernet Interface               | 1 RJ45 10 M/100 M self-adaptive Ethernet port                                                                                                                                                                                                                                                                                                         |
| On-Board Storage                 | Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB                                                                                                                                                                                                                                                                     |
| Audio                            | 1 input (line in), 3.5 mm connector, max. input amplitude: 3.3 Vpp, input impedance: 4.7 K $\Omega$ , interface type: non-equilibrium,<br>1 output (line out), 3.5 mm connector, max. output amplitude: 3.3 Vpp, output impedance: 100 $\Omega$ , interface type: non-equilibrium                                                                     |
| Alarm                            | 1 input, 1 output (max. 24 VDC/24 VAC, 1 A)                                                                                                                                                                                                                                                                                                           |
| Reset Key                        | Yes                                                                                                                                                                                                                                                                                                                                                   |
| <b>Event</b>                     |                                                                                                                                                                                                                                                                                                                                                       |
| Basic Event                      | Motion detection (support alarm triggering by specified target types (human and vehicle)), video tampering alarm, exception                                                                                                                                                                                                                           |
| Smart Event                      | scene change detection, audio exception detection, defocus detection, unattended baggage detection, object removal detection                                                                                                                                                                                                                          |
| Linkage                          | Upload to FTP/NAS/memory card, notify surveillance center, send email, trigger alarm output, trigger recording, trigger capture, audible warning                                                                                                                                                                                                      |
| <b>Deep Learning Function</b>    |                                                                                                                                                                                                                                                                                                                                                       |
| Perimeter Protection             | Line crossing, intrusion, region entrance, region exiting<br>Support alarm triggered by specified target types (human and vehicle)                                                                                                                                                                                                                    |
| Face Capture                     | Yes                                                                                                                                                                                                                                                                                                                                                   |
| People Counting                  | Yes                                                                                                                                                                                                                                                                                                                                                   |
| <b>General</b>                   |                                                                                                                                                                                                                                                                                                                                                       |
| Power                            | 12 VDC $\pm$ 25%, 1.25 A, max. 15 W, two-core terminal block,<br>PoE: IEEE 802.3at, Class 4, max. 18 W                                                                                                                                                                                                                                                |
| Material                         | Metal                                                                                                                                                                                                                                                                                                                                                 |
| Dimension                        | $\varnothing$ 153.5 mm $\times$ 133.1 mm ( $\varnothing$ 6.0" $\times$ 5.2")                                                                                                                                                                                                                                                                          |
| Package Dimension                | 244 mm $\times$ 174 mm $\times$ 173 mm (9.6" $\times$ 6.9" $\times$ 6.8")                                                                                                                                                                                                                                                                             |
| Weight                           | Approx. 865 g (1.9 lb.)                                                                                                                                                                                                                                                                                                                               |
| With Package Weight              | Approx. 1750 g (3.9 lb.)                                                                                                                                                                                                                                                                                                                              |
| Storage Conditions               | -30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                     |
| Startup and Operating Conditions | -30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                     |
| General Function                 | Heartbeat, anti-banding, mirror, flash log, password reset via email, pixel counter                                                                                                                                                                                                                                                                   |
| Language                         | 33 languages: English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian |
| <b>Approval</b>                  |                                                                                                                                                                                                                                                                                                                                                       |
| EMC                              | CE-EMC: EN 55032: 2015, EN 61000-3-2:2019, EN 61000-3-3: 2013+A1:2019, EN 50130-4: 2011 +A1: 2014,<br>IC: ICES-003: Issue 7,<br>KC: KN32: 2015, KN35: 2015,<br>RCM: AS/NZS CISPR 32: 2015                                                                                                                                                             |

|             |                                                                                                                                                                |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety      | UL: UL 62368-1,<br>CB: IEC 62368-1: 2014+A11,<br>CE-LVD: EN 62368-1: 2014/A11: 2017,<br>BIS: IS 13252 (Part 1): 2010/IEC 60950-1: 2005,<br>LOA: IEC/EN 60950-1 |
| Environment | CE-RoHS: 2011/65/EU,<br>WEEE: 2012/19/EU,<br>Reach: Regulation (EC) No 1907/2006                                                                               |
| Protection  | IP66: IEC 60529-2013,IK10: IEC 62262:2002                                                                                                                      |

## ▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has NO SPECIFIC PROTECTION.


| Level                  | Description                                                                                                                                                                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Top-level protection   | Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.                                             |
| Moderate protection    | Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain. |
| No specific protection | Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.                                                                                                                                  |

## ▪ Available Model

DS-2CD3746G2-IZS(2.7-13.5mm)(H)

DS-2CD3746G2-IZS(7-35mm)(H)

## Dimension

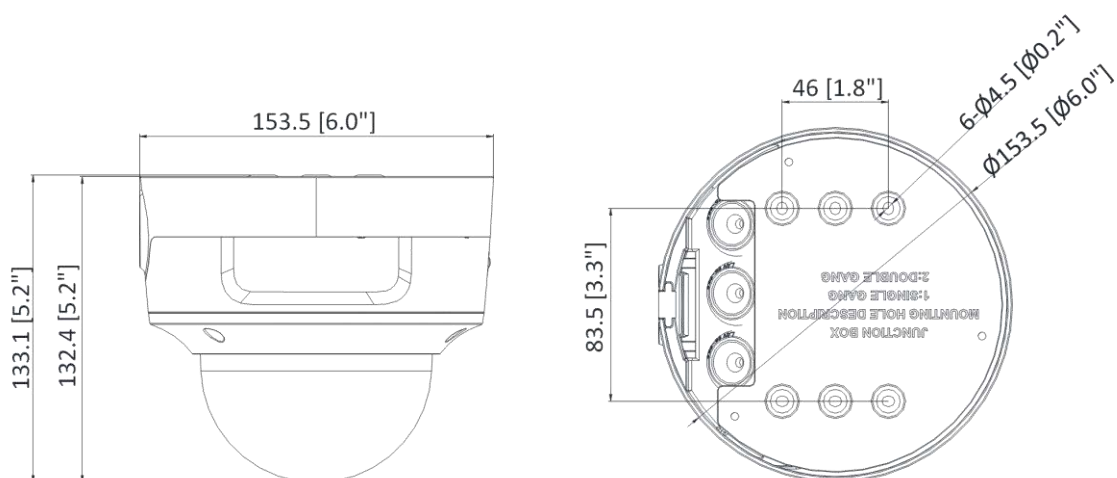

Unit: mm (inch)

## Accessory

### Optional

| DS-1473ZJ-155<br>Wall mount                                                         | DS-1471ZJ-155<br>Pendant Mount                                                      | DS-1475ZJ-SUS<br>Vertical pole mount                                                | DS-1275ZJ-SUS<br>Vertical pole mount                                                  | DS-1227ZJ-DM37<br>In-ceiling mount                                                    |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| DS-1476ZJ-SUS<br>Corner mount                                                       | DS-1276ZJ-SUS<br>Corner mount                                                       | DS-1250ZJ<br>Water-proof                                                            | DS-1473ZJ-155B<br>Wall mount                                                          |                                                                                       |
|  |  |  |  |                                                                                       |

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq