



**Manual**

EN

Appendix

## **Blue Solar PWM Pro setup and monitoring software**





## Contents

1.	Region and language settings	2
2.	Download the software	2
3.	UnRAR the software	2
4.	Install the software	3
5.	Install and configure the USB driver	3
6.	Establishing communication	7
7.	Other settings	12
8.	Monitoring more than one controller	18

### 1. Region and language settings

(Control Panel > Clock, Language and Region)

Different language windows systems have a different character format, therefore the region and language settings must be set to "United States" resp. "English (United States) – US".


These settings can be found under "Region and Language" on the Control Panel of the computer.

### 2. Download the software


Download the software to your PC from the Victron Energy site.

### 3. UnRAR the software

Use WinZip or RarZilla Free Unrar.

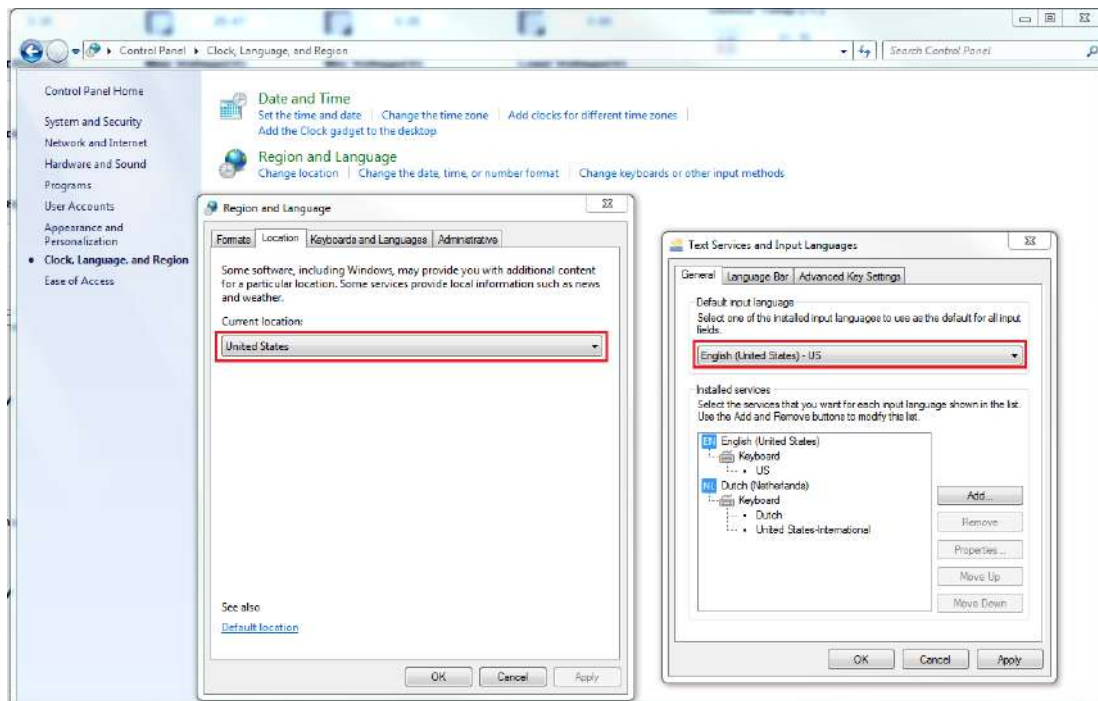

#### 4. Install the software

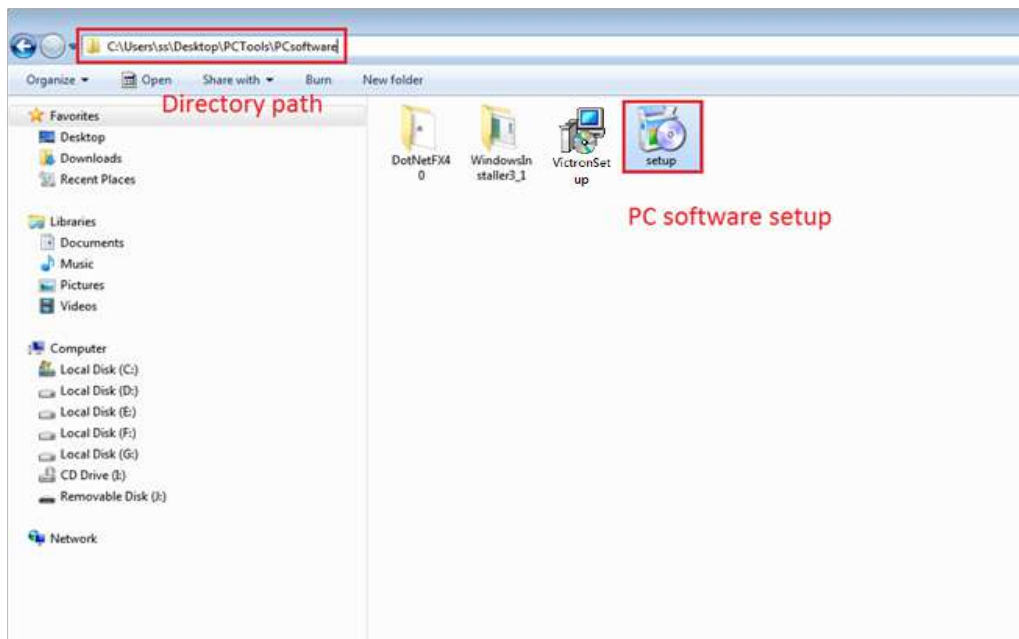


After installation a Victron icon should appear on the computer screen:




#### 5. Install and configure the USB driver

- 5.1 **Plug the BlueSolar PWM-Pro to USB interface cable (SCC940100200) into the controller and a USB port of the computer.** Plug in one controller only. More controllers (= stations) can be plugged in after installation of the first one, see section 7)

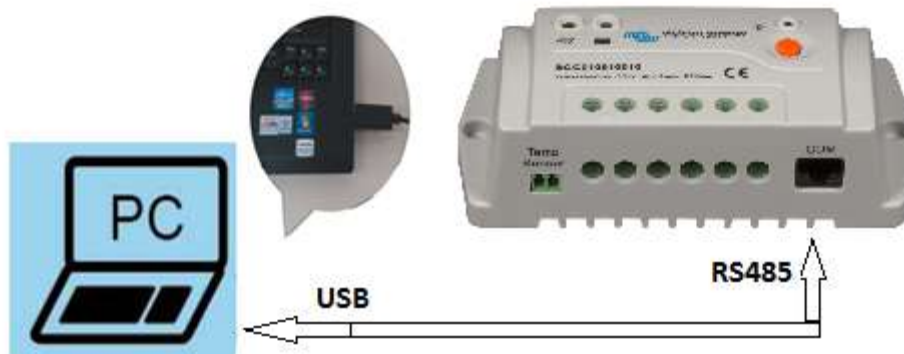


## 5.2 Install the USB driver

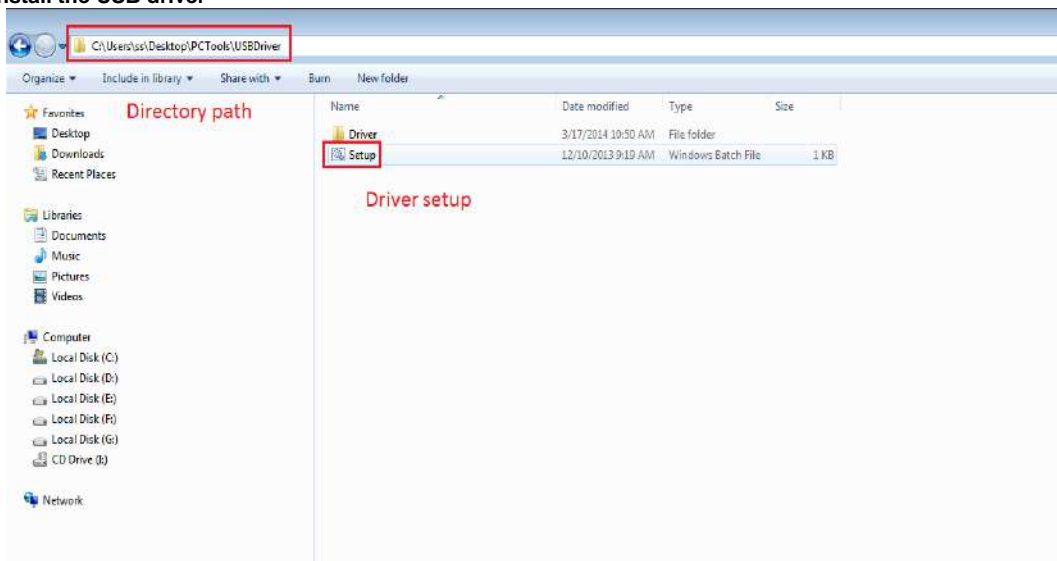


## 5.3 Configure (Control Panel > Device Manager > Ports (COM and LPT))

In the Device Manager, double click on the port attributed to the interface cable (XR21B1411). Remember the Port number (in this example it is COM3): it will be needed later (in section 5.1 and 5.5). The properties must be set as shown below:

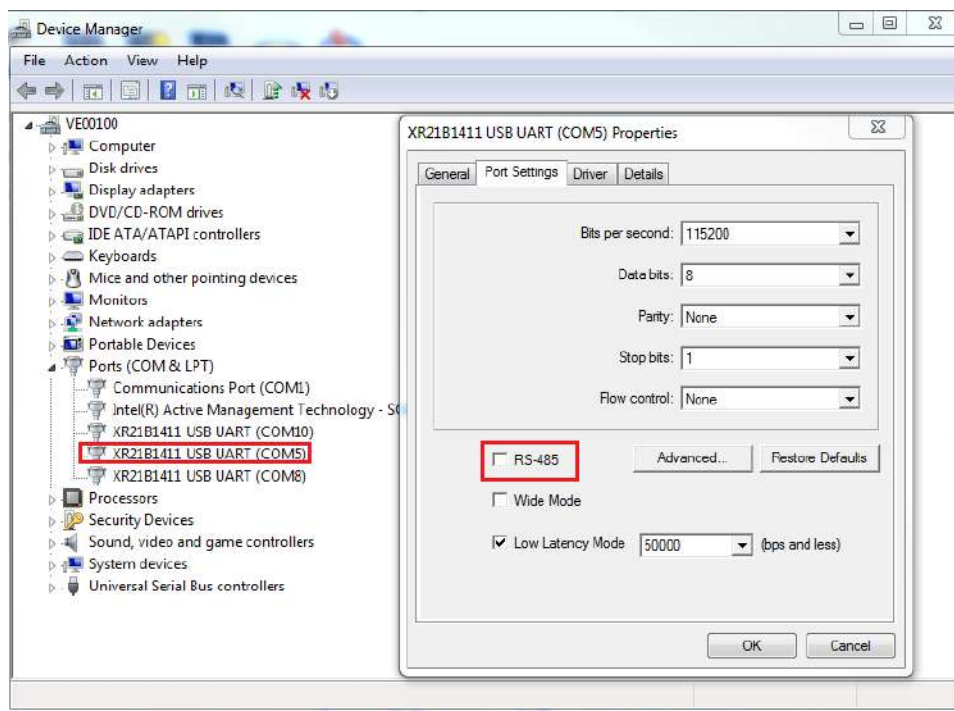

#### 5.4 Check the box RS-485

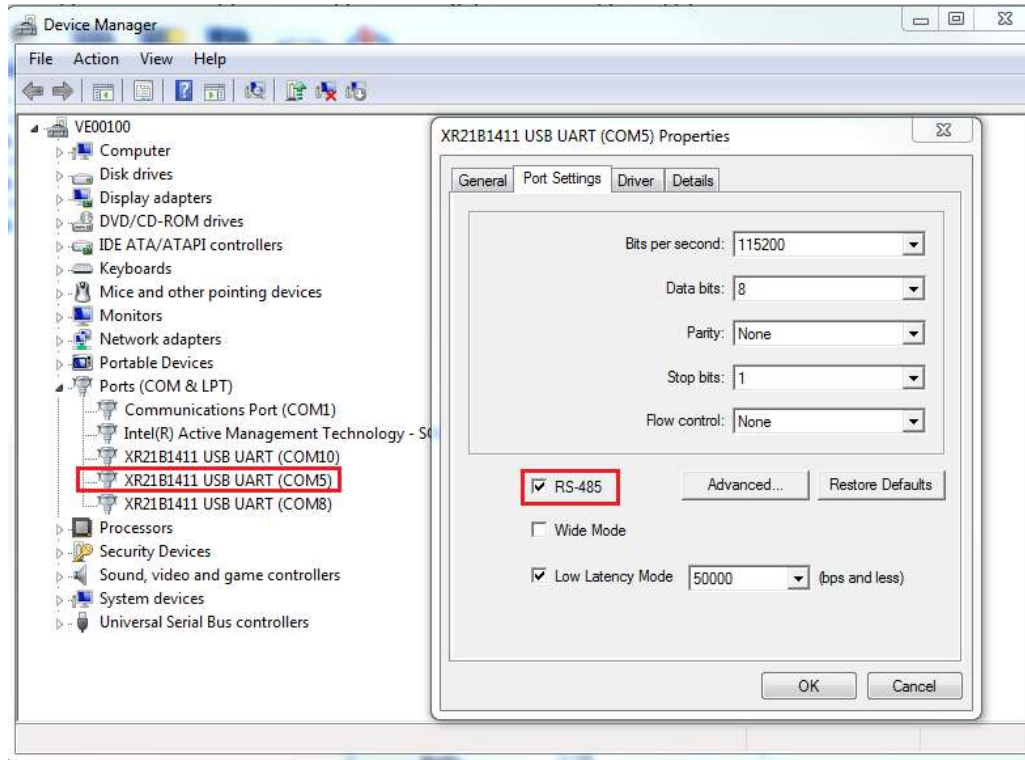

Logging in


#### 5.5 Click the “Solar Station Monitor” icon



#### 5.6 The Log in screen will pop up


When logging in as administrator, settings of the controller can be changed and a password is needed. The default password is “111111”.

When logging in as guest, settings cannot be changed no password is needed.

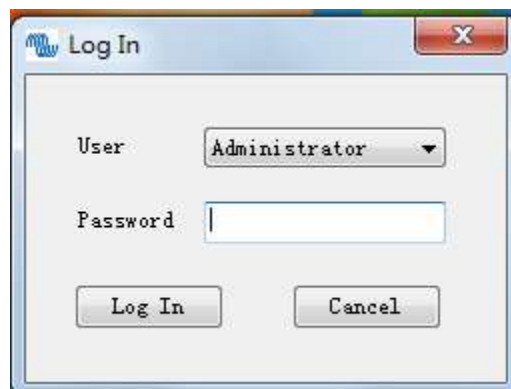

**victron energy**

# Appendix



6. **Establishing communication with one controller only**

6.1 Click the menu “Communication (C)” in the menu bar of the screen shown in section 5.3.

The dialog box “Serial Port Setting” will appear.

Enter the correct Port number (see section 3.3) and the correct Baud rate (115200).

The Port number must appear under “Configuration” on the right hand side of the dialog box.

If needed, click on “Device Manager” to set the correct Data Bits, Stop Bits and Parity.

Press “Add”.

Press “Update” and close the dialog box.



## 6.2 Station information (= system data)



Click the button in the toolbar, and the dialog box "Station information" as shown below will pop-up.

All boxes marked with "\*" must be completed.

The other boxes are for user information only.

Guidelines:

*Station Name: any name can be entered (for example: station 1)*

*Device ID: always enter the number 1 (other numbers are intended for eventual future products)*

*District: the geographical district or province or street + number*

*Location: the location (for example: roof of bicycle shed)*

*Rated power (W): Wp power of the solar array (for example: 200)*

*Rated voltage (V): Voltage of the battery (for example: 12 or 24)*

*Battery capacity Ah): the capacity of the battery (for example: 60)*

Press "Update".

Station Information

Station Name: SCC010020110 \*

Device ID: 1 \*

District: Drenthe \*

Location: Roof \*

Contacts:

Contacts:

Rated Power(W): 200 \*

Installation Time: 11/14/2014 \*

Rated Voltage(V): 24 \*

Battery Capacity(Ah): 60

Remarks:

Click to add picture

Notice: Items with \* must be filled

Update Exit



### 6.3 PV Arrays (= system data)

Click the tab "PV Arrays" in the "Station information" dialog box.

All boxes marked with "\*" must be completed.

The other boxes are for user information only.

Guidelines:

Type: is for user information only

Peak Power: this is the peak power of each string of solar panels in W (for example: 200)

No of parallel strings: the number of parallel strings (for example: 1)

Special Instructions: is for user information only

Peak Power of the complete array (W) = ([Peak Power] x [No of parallel strings]) in Watt

Supplier name: is for user information only

Supplier contacts: is for user information only

Press "Update".

The screenshot shows a software window titled "Station Information" with a close button (X) in the top right corner. It contains four tabs: "Station Information", "PV Arrays", "Battery", and "Controller". The "PV Arrays" tab is selected. The form has several input fields: "Type" (containing "2x SPM101-12 in series"), "Peak Power" (containing "200" and marked with an asterisk), "Array Number" (containing "1"), "No. of each Parallel Arrays" (containing "1" and marked with an asterisk), "Special Instructions" (empty), "Peak Power of total(W)" (containing "200" and marked with an asterisk), "Supplier Name" (empty), "Supplier Contacts" (empty), and "Remarks" (a large empty text area). To the right of these fields is a box with the text "Click to add picture". At the bottom, there is a notice: "Notice: Items with \* must be filled", and two buttons: "Update" and "Exit".

Type	2x SPM101-12 in series
Peak Power	200 *
Array Number	1
No. of each Parallel Arrays	1 *
Special Instructions	
Peak Power of total(W)	200 *
Supplier Name	
Supplier Contacts	
Remarks	

Notice: Items with \* must be filled

Update Exit

#### 6.4 Battery (= system data)

Click the tab "Battery" in the "Station information" dialog box.

Guidelines:

*Type: is for user information only (for example: USER, SEALED, GEL, FLOODED)*

*Battery capacity (Ah): already done in tab: "Station information" (section 5.2)*

*Specifications: is for user information only (for example: BAT412550100)*

*Voltage of each battery: is for user information only (for example: 12V)*

*Number of each parallel battery: is for user information only*

*Supplier name: is for user information only (for example: Victron Energy)*

*Supplier contacts: is for user information only*

Press "Update".

Station Information

Station Information PV Arrays Battery Controller

Type: Gel

Battery Capacity(Ah): 60

Specifications: BAT412550100

Ah of Each Battery(Ah): 60

Voltage Of Each Battery: 12

No. of each Parallel Battery: 1

Supplier Name: Victron Energy

Supplier Contacts:

Remarks:

2x 12V60Ah in series

Click to add picture

Notice: Items with \* must be filled

Update Exit



## 6.5 Controller (= system data)

Click the tab "Controller" in the "Station information" dialog box.

Guidelines:

*Device ID: already done in tab: "Station information"*

*Monitor period: is for user information only*

*Specifications: is for user information only (for example: 12/24V-10A)*

*Rated power: is for user information only (for example: 200)*


*Supplier name: is for user information only (for example: Victron Energy)*

*Supplier Contacts: is for user information only*

*Allow Communication: must be on*

*Port: Select the COM port (for example: COM5). This COM port must be the same as selected in section 3.3 and 4.1*

Press "Update" and close the dialog box.

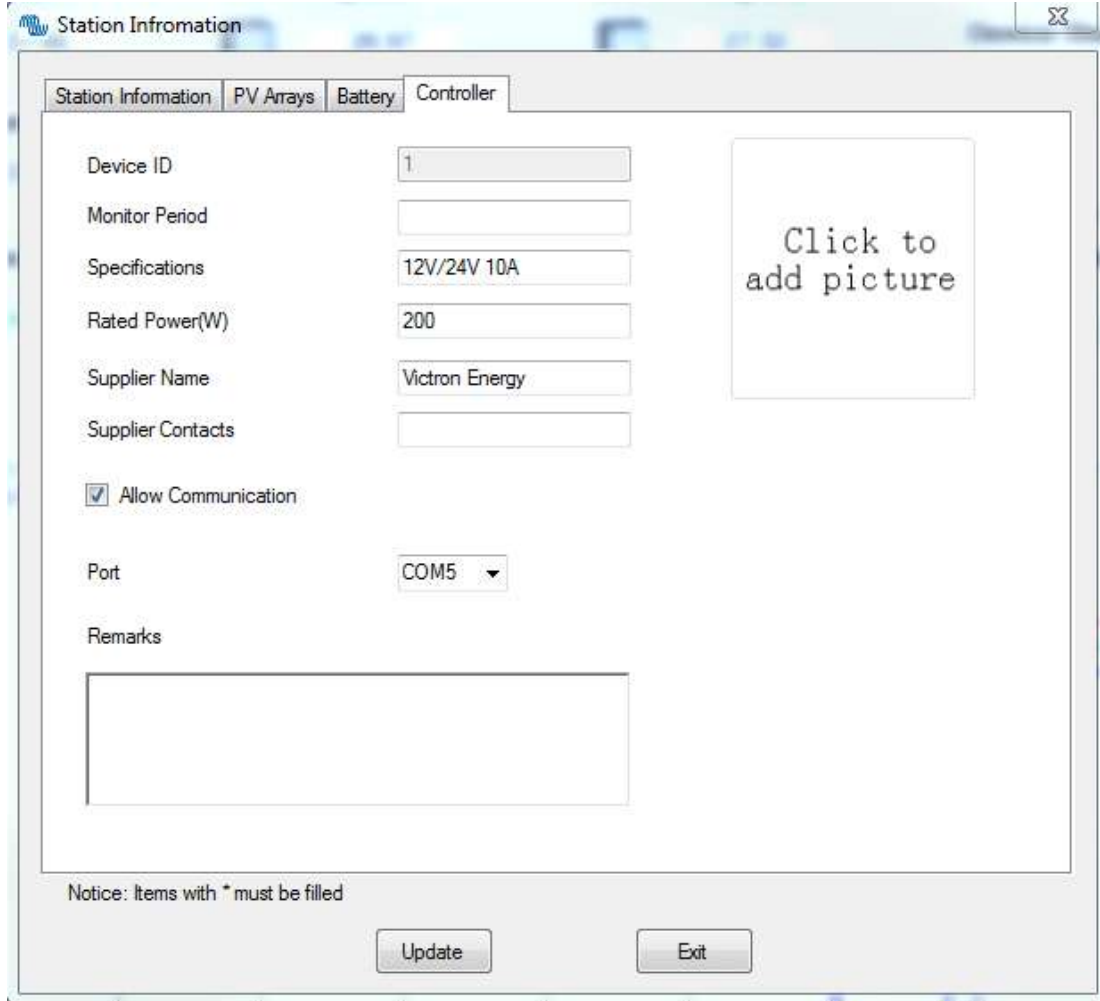

The screenshot shows the 'Station Information' dialog box with the 'Controller' tab selected. The dialog box has a title bar with a close button. Inside, there are four tabs: 'Station Information', 'PV Arrays', 'Battery', and 'Controller'. The 'Controller' tab is active. It contains several input fields and a checkbox. The 'Device ID' field is filled with '1'. The 'Monitor Period' field is empty. The 'Specifications' field is filled with '12V/24V 10A'. The 'Rated Power(W)' field is filled with '200'. The 'Supplier Name' field is filled with 'Victron Energy'. The 'Supplier Contacts' field is empty. There is a checkbox labeled 'Allow Communication' which is checked. Below the checkbox is a 'Port' dropdown menu showing 'COM5'. At the bottom of the dialog box, there is a 'Remarks' text area which is empty. A notice at the bottom left states 'Notice: Items with \* must be filled'. At the bottom right, there are two buttons: 'Update' and 'Exit'. On the right side of the dialog box, there is a large rectangular area with the text 'Click to add picture'.

Station Information

Station Information PV Arrays Battery Controller

Device ID 1

Monitor Period

Specifications 12V/24V 10A

Rated Power(W) 200

Supplier Name Victron Energy

Supplier Contacts

☒ Allow Communication

Port COM5

Remarks

Click to add picture


Notice: Items with \* must be filled

Update Exit

## 6.6 Monitoring (M): Real-time monitoring



Click the button in the toolbar, or Monitoring (M) and the real-time monitoring interface is displayed in the display section of main interface. To start real time monitoring, click the button “Start monitor”.

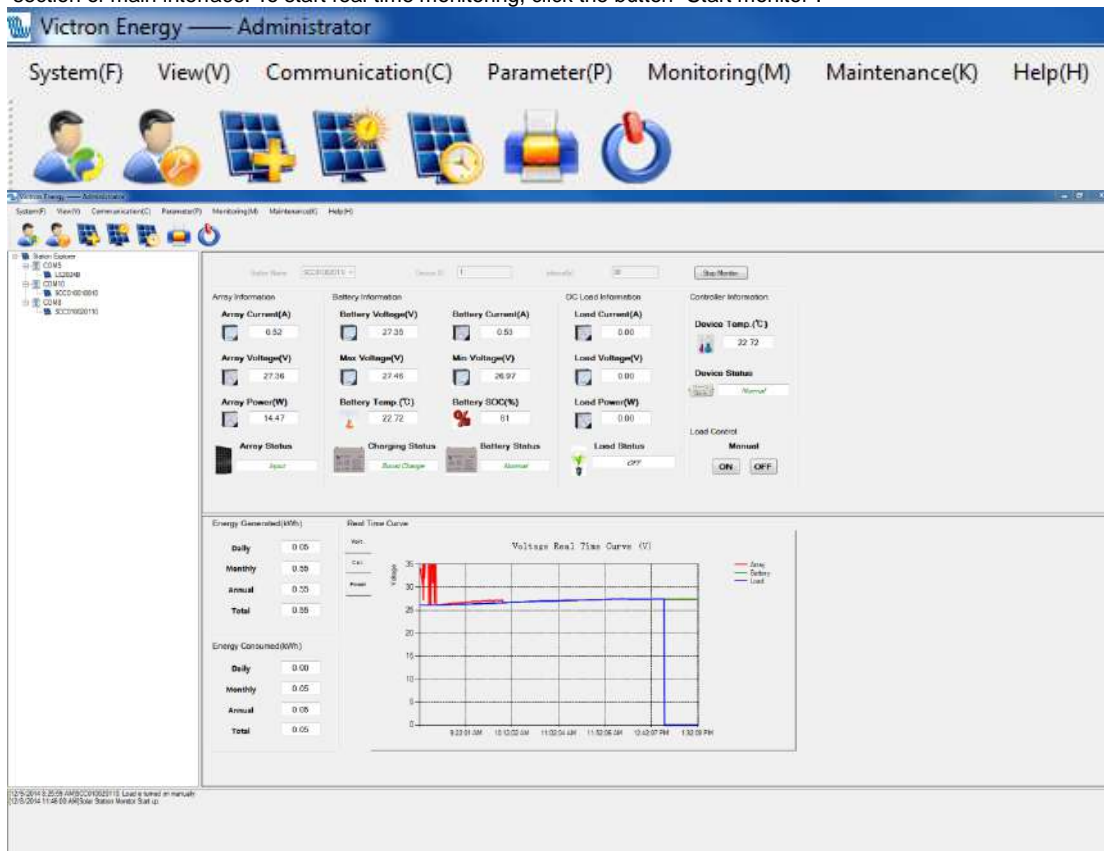

## 7 Other settings

### 7.1 System (F)


[Log Off] *To log off from the monitoring software.*  
[User Switch] *To switch from Administrator to Guest or from Guest to Administrator.*  
[Change Password] *Change Password for the monitoring software.*  
[Add Station] *Monitor additional stations. See section 7.*  
[Print Setup] *For printing the "Real Time Curve"*  
[Print Preview(V)] *For previewing the print of the "Real Time Curve"*  
[Exit(X)] *Exit/End the monitoring software*

### 7.2 View(V)


[Tool Bar(T)] *Shows or hides the toolbar*



[Station Explorer] *Shows or hides the Station Explorer on the left side of the screen*

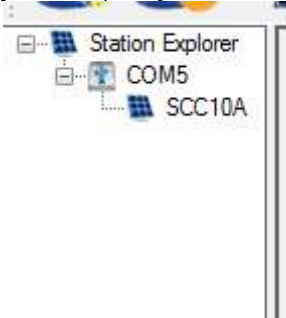

[Messages Window] *Shows or hides the Messages Window on the bottom of the screen.*

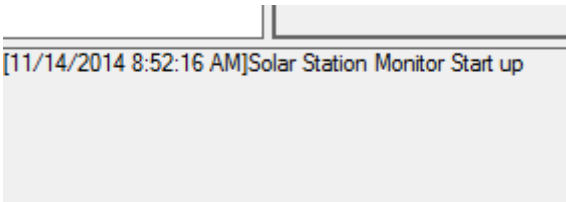


### 7.3 Communication (C)

[Serial port setting] *See 5.1*

### 7.4 Parameter (P)


[Device Parameters]

[Real Time Clock] *Configuring and setting of the internal clock of the Solar Charge Controller*

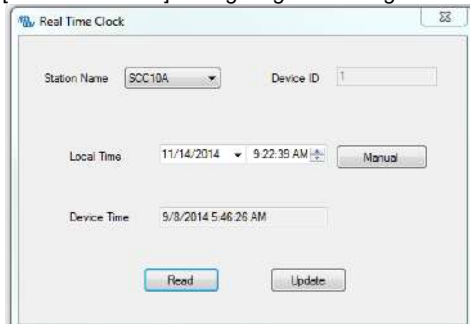

Press "Read" to see the date and time setting of the controller.  
The date and time setting can be modified by pressing "Update" after setting the correct date and time.

[Device Parameter setting] *Setting of the internal and external temperature limits.*

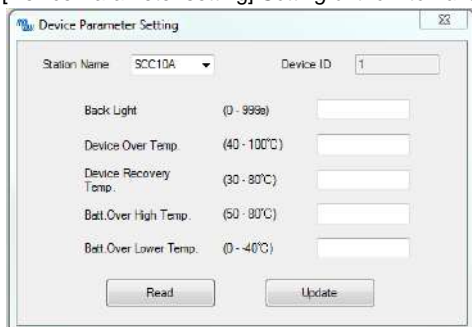

Device Parameter Setting dialog box. Station Name: SCC10A, Device ID: 1. Parameters to be set:

Parameter	Range	Value
Back Light	(0 - 999a)	
Device Over Temp.	(40 - 100°C)	
Device Recovery Temp.	(30 - 80°C)	
Batt.Over High Temp.	(50 - 80°C)	
Batt.Over Lower Temp.	(0 - -40°C)	

Buttons: Read, Update


[Device ID Setting]



Device ID Setting dialog box. Port: [Dropdown], ID: [Input]. Warning: Before reading or setting device Id, make sure that the serial port only connect to one device. Button: Set ID

The ID must be set to "1"

[Control Parameter] Battery settings

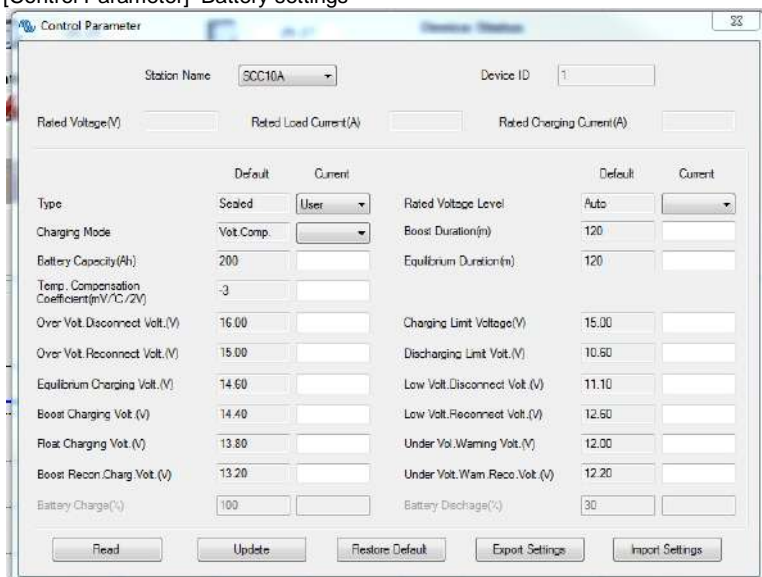

Control Parameter dialog box. Station Name: SCC10A, Device ID: 1. Parameters to be set:

Parameter	Default	Current	Parameter	Default	Current
Rated Voltage(V)			Rated Voltage Level	Auto	
Rated Load Current(A)			Boost Duration(m)	120	
Rated Charging Current(A)			Equilibrium Duration(s)	120	
Type	Sealed	User	Charging Limit Voltage(V)	15.00	
Charging Mode	Volt Comp.		Discharging Limit Volt.(V)	10.60	
Battery Capacity(Ah)	200		Low Volt.Disconnect Volt.(V)	11.10	
Temp. Compensation Coefficient(mV/°C/2V)	-3		Low Volt.Reconnect Volt.(V)	12.60	
Over Volt.Disconnect Volt.(V)	16.00		Under Volt.Warning Volt.(V)	12.00	
Over Volt.Reconnect Volt.(V)	15.00		Under Volt.Warm Reco.Volt.(V)	12.20	
Equilibrium Charging Volt.(V)	14.60		Battery Charge(%)	100	
Boost Charging Volt.(V)	14.40		Battery Discharge(%)	30	
Float Charging Volt.(V)	13.80				
Boost Recon.Charg Volt.(V)	13.20				

Buttons: Read, Update, Restore Default, Export Settings, Import Settings



The table below shows the list of battery related parameters that can be modified.

Parameter		Default setting		
Battery type	Gel	Sealed (AGM)	Flooded	User defined
Battery capacity (Ah)	200Ah			1~9999
Temperature compensation coefficient	-3mV/°C per 2V cell			0~9
Rated voltage (system voltage)	Auto			12V/24V
Over voltage load disconnect	16.0V			9~17V
Charge limit (highest charge voltage including temp. compensation)	15.0V			9~17V
Over voltage load reconnect	15.0V			9~17V
Equalize charge	—	14.6V	14.8V	9~17V
Boost charge (absorption charge)	14.2V	14.4V	14.6V	9~17V
Float charge	13.8V	13.8V	13.8V	9~17V
Boost trigger voltage (starts new charge cycle)	13.2V			9~17V
Low voltage load reconnect	12.6V			9~17V
Under voltage warning reset	12.2V			9~17V
Under voltage warning	12.0V			9~17V
Low voltage load disconnect (nominal value at 25°C)	11.1V			9~17V
Discharge limit (lowest low voltage load disconnect including temp. compensation)	10.6V			9~17V
Equalize duration	—	2 hrs.	2 hrs.	0~3 hrs.
Boost/absorption duration	2 hrs.	2 hrs.	2 hrs.	0~3 hrs.

**Multiply voltages by 2 for a 24V system**

Press “Read” to see the current settings

Press “Update” to save the (modified) settings

Press “Export Settings” to save settings in a file for later use in another controller

Press “Import Settings” to restore the saved settings or import saved settings into another controller

[Load Configuration]

Configuration of the Load output



**victron energy**

### Option 1: Manual Control

When the load output is set on Manual Control (default setting), the output can be switched ON or OFF with the orange button on the Charge Controller. The low voltage cut-off is also operational.

### Option 2: Light ON/OFF

This is a simple load output ON/OFF option, based on the input voltage of the controller (= output voltage of the solar array).

- When, at dusk, the input voltage of the Controller becomes lower than the light ON voltage (default 0.50 V), the load output is switched on.
- When, at dawn, the input voltage of the Controller becomes higher than the light OFF voltage (default 0.40 V), the load output is switched off.
- In order to prevent unwanted switching a confirmation time (Delay (m)) can be set: default 10 minutes, range 0 – 99 minutes.


### Option 3: Light ON+Timer

This option allows for a pre-set ON-time after dusk and a pre-set OFF-time before dawn.

The dusk and dawn switching moments and confirmation time are set as under option 2.

The remaining parameters are set as follows:

- Night Time: initial setting of the night duration, the controller will subsequently adjust Night Time to the actual duration of the night.
- On Time 1: ON period after dusk.
- On Time 2: ON period before dawn.

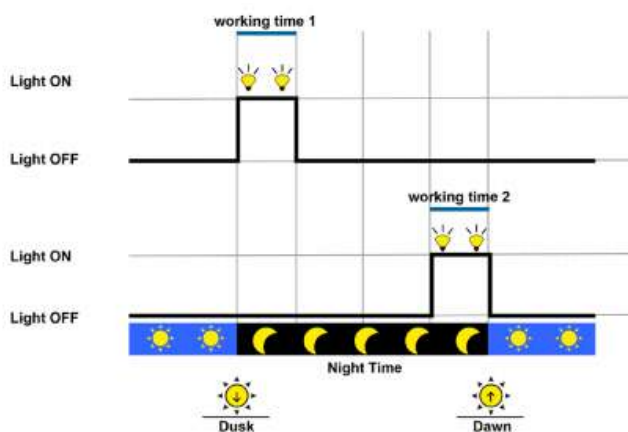

### Option 4: Time control

This option uses the internal clock (see section 6.5) to set one or two ON-time periods.


Press "Read" to see the current settings

Press "Update" to save the (modified) settings

Press "Export Settings" to save settings in a file for later use in another controller

Press "Import Settings" to restore the saved settings or import saved settings into another controller

[System Configuration]

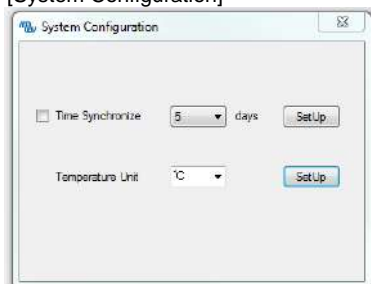

To regularly synchronize the time setting of the charge controller with the PC: choose "not", every "5" or "10" days and press "SetUp"

Temperature unit setting: choose "°C" or "°F" and press "SetUp"



**victron energy**

#### [Device Information]

Station Name: SCC10A  
 Device ID: 1  
 Device Model: LS2024B  
 Device Version: V2.11~V7.15  
 Device SN: 010201402000063  
 Read

Press "Read" to display the station name, model, version and serial number

#### [Factory Operation]

Station Name: SCC10A  
 Device ID: 1  
 Load Test: ON OFF  
 Restore Default  
 Clear Data

Press Load Test "ON" or "OFF" to test the load output

Press "Restore Default" to reset to factory settings

Press "Clear Data" to clear all collected data

### 7.5 Monitoring (M)

[Real time Monitoring] See 5.6

[Global Monitoring] Displays a list and status of all connected stations.

Interval(s)

30

Start Monitor

Energy Generated(kWh)

23.64

Energy Consumed(kWh)

2.75

Station Name	ID	Device Status	Array Status	Charging Status	Load Status	Battery Status	Char.energy (kWh)	Dischar.energy (kWh)
LS2024B	1	Normal	Cut Out	Not Charging	ON	Undervoltage	23.23	2.20
SCC010010010	1	Normal	Cut Out	Not Charging	ON	Undervoltage	0.00	0.50
SCC010020110	1	Normal	Input	Boost Charge	ON	Normal	0.41	0.05

### 7.6 Maintenance (K)

[Export Data] "Export Data" Saves all data to file.

[Import Data] "Import Data" Restores all data from file.

[Maintenance Record] Text file to record maintenance events.

### 7.7 Help (H)

[About] There is no online help. See this manual for help

## 8 Monitoring more than one controller

In order to keep track of each controller we strongly recommend connecting one controller at a time (by plugging in the interface cable), establish communication and configure it.

After completion, proceed with the next controller.

Each time, follow the procedure as outlined in section 3.1, 3.3, 5 and 6.



# Victron Energy Blue Power

Distributor:

Serial number:

Version : 01  
Date : 12 January 2015

Victron Energy B.V.  
De Paal 35 | 1351 JG Almere  
PO Box 50016 | 1305 AA Almere | The Netherlands

General phone : +31 (0)36 535 97 00  
Customer support desk : +31 (0)36 535 97 03  
Fax : +31 (0)36 535 97 40

E-mail : [sales@victronenergy.com](mailto:sales@victronenergy.com)

[www.victronenergy.com](http://www.victronenergy.com)